

Series F2202/04.. - F2209/04..

The flanged valve of the 22 series in the control type direct and externally controlled requires compressed air between 4-8bar for switching. The spring-loaded piston actuator is pressurised with compressed air and directly lifts the valve disc from the seat. The valve is closed by spring force. The robust design has fast reaction times with high positioning forces of spring and control pressure.

For more information follow this link:

<https://www.buschjostventile.de/en/products/F-2202-04-F-2209-04/details/F2206-0402-7015-OF?pressureRangId=166>

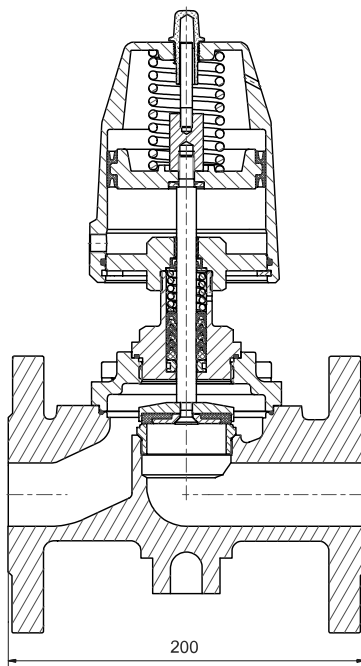


Image representation corresponds only to the valve design


Valve F2206/0402/7015-OF

Version	F	
Type of valve	22	Seat Valve, pneum. direct
Connection type, valve seat	06	DN50, 50mm
Kv-value ($\Delta p = 1 \text{ bar H}_2\text{O}$)		43 m ³ /h
Housing	04	EN-GJL250 grey cast
Sealing	02	FKM
Function	7	CLOSED with spring
Design	0	straight seat, actuator aluminium
Actuator size	15	ø50 soft closing
Actuator volume		60 cm ³
Valve option	OF	Free of oil and grease
System pressure		0 - 2 bar (the max. operating pressure requires a control pressure of min. 6 bar)
Control pressure		6 - 8 bar
Temperature Medium		from -10 °C to +140 °C
Temperature Environment		from -10 °C to +60 °C
Mounting position		in any position
Specific use case		Closed system (includes open system)

Drawing-Standard



Switching position



in Ruhestellung zu
normal closed

Fließrichtung festgelegt
flow direction defined

Additional information

Valve option	OF	Free of oil and grease
Description		Cleaned, labeled and individually packed. May contain Oxygen approved lubricants.
REACH-RoHS conformity		REACH yes RoHS yes
Net weight		11.2 kg
Customs export		Customs tariff number 84812090; Country of origin Germany; ECCN (US): N; AL: N

Additional information for valve option



Die Ventiltteile werden gewaschen und wenn erforderlich, mit zugelassenem Gleitmittel behandelt sowie gekennzeichnet:

Öl- und fettfrei

The parts of valves will be free of oil and grease cleaned and if necessary, the parts will treat with approved lubricant and marked:

free of oil & grease