

Series 2/918-.-10-R282

2/2-way direct operated axial slide solenoid valve for high viscosity, jelly-like and dirty fluids up to 160 bar pressure. The valve is back pressure resistant up to 16bar. Installation in horizontal or vertically pipe.

For more information follow this link:

<https://www.buschjostventile.de/en/products/2-918-10-R-282/details/2-918-27-1024-R282-OF?pressureRangeld=307>





Image representation corresponds only to the valve design

Valve 2/918-27/1024/R282-OF


Version	2/918-	
Type of valve		Coaxial Valve, pneum. direct
Connection type, valve seat	27	G6/4, 40mm
Kv-value ($\Delta p = 1 \text{ bar H}_2\text{O}$)		45.7 m³/h
Housing	10	CW617N brass
Sealing	24	PTFE/FKM
Function	R	with spring CLOSED
Design	28	sliding type
Actuator size	2	sliding
Valve option	OF	Free of oil and grease + Back pressure safe
System pressure		0 - 160 bar (the max. operating pressure requires a control pressure of min. 6 bar)
Control pressure		6 - 10 bar
Temperature Medium		from -20 °C to +100 °C
Temperature Environment		from -10 °C to +60 °C
Mounting position		in any position
Specific use case		Closed system (includes open system)

Drawing-Standard

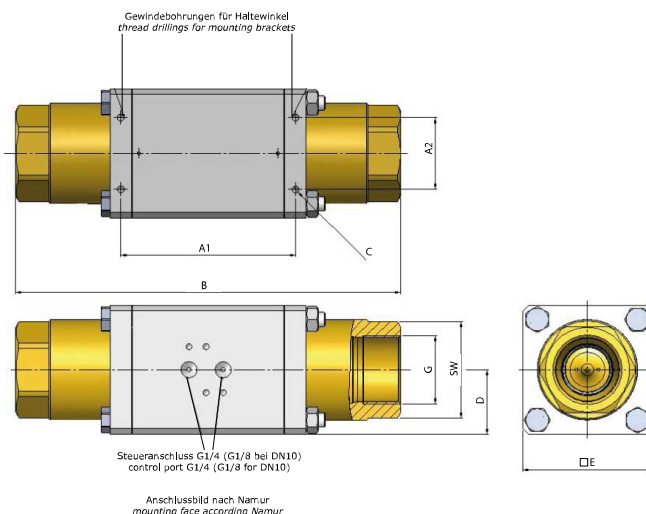

(mm)	DN	G	SW	A1	A2	B	C	D	E	Gewicht weight ca. Kg
Version 0-160 bar	10	1/2	32	84	-	160	M4	25	50	1,6
	15	1/2	41	100	-	184	M5	35	70	2,8
	20	3/4-1	46	108	-	215	M5	40	80	4,0
	25	1	55	121	-	246	M5	45	90	5,3

Switching position



in Ruhestellung zu
normal closed


P ➤ A max. specif. pressure

A ➤ P limited to 16 bar !

Additional information

Valve option	OF	Free of oil and grease + Back pressure safe
Description		Cleaned, labeled and individually packed. May contain Oxygen approved lubricants. Pressure in both directions
REACH-RoHS conformity		REACH yes RoHS yes
Customs export		Customs tariff number 84812090; Country of origin Germany; ECCN (US): N; AL: N

Additional information for valve option

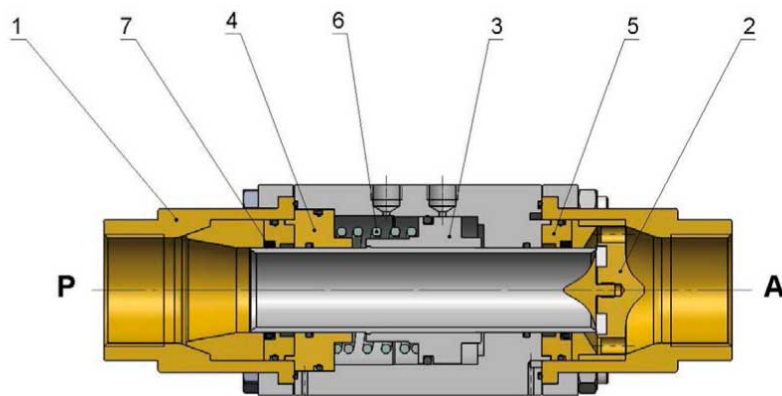

1	Anschlussstück	<i>adapter fitting</i>
2	Ventilsitz	<i>valve seat</i>
3	Kolben/ Steuerrohr	<i>piston / tube</i>
4	Betätigungsscheibe	<i>actuating plate</i>
5	Führungsscheibe	<i>guiding disk</i>
6	Feder	<i>spring</i>
7	PTFE Stangendichtung	<i>PTFE-rod seal</i>